

# BEX600 Extra Heavy Grade Panel



## PSA MOB PF2 PS/SPU Extra Heavy Grade

The panel consists of a high grade, FSC® certified, 44mm high density particle board core, in a sandwich construction, with a steel top and bottom sheet. This then has a full depth ABS edge band applied creating a fully encapsulated 600mm<sup>2</sup> panel to be laid with complete electrical continuity and has a high resistance to damage.

Product	Panel Grade	Point Load (25mm x 25mm)	4 Point Loading	Uniform Distributed Load (kN/m <sup>2</sup> )	Panel Thickness (Nominal)	System Weight (Typical)
BEX600	Extra Heavy	4.5 kN	11.0 kN	12.0 kg/m <sup>2</sup>	46mm	55kg/m <sup>2</sup>

### Certification

The panel meets the loadings of PSA MOB PF2 PS/SPIJ March 1992 Extra Heavy Grade specification. All of the Permaflor PSA panels have a 3 times working load safety factor, Class "O" spread of flame resistance and a 25 year warranty.

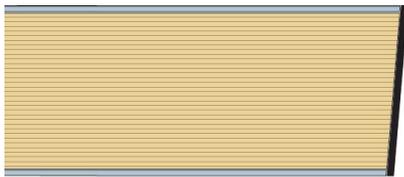

Full depth ABS edging

Galvanised steel top and bottom sheet



### Finish

All of the Permaflor Edge Banded panels can have a wide range of factory bonded finishes that include wood, ceramic tile, carpet, high pressure laminate and vinyl. All of the edge banded factory bonded panels can be perforated for air flow. Whatever your requirement, Permaflor will have the flooring solution to suit you.

### Manufacture

All panels are manufactured in our flexible manufacturing facility in the UK, which allows us to offer total flexibility whilst maintaining the highest possible quality standard and ensures fast reaction and a reliable service. Materials used are sourced from high quality suppliers and use renewable, sustainable sources and suppliers wherever possible. We can also offer a bespoke service and specialise in replicating and reproducing existing raised floors.



**Permaflor**  
access flooring solutions

The first choice for access flooring systems

For more information call  
**01432 347 722**  
sales@permaflor.co.uk