

BGM600C Steel Encapsulated Carpet Panel


PSA MOB PF2 PS/SPU Medium Grade

The panel consists of a high grade FSC® certified 30mm high density particle board core, with a steel top lid and bottom tray, all pressed together to make a fully steel encapsulated 600mm² panel. It then has Burmatex 3230 Classic Anti Static Carpet or other customer approved factory bonded to the top steel producing a fully removable carpet panel.

Product	Panel Grade	Point Load (25mm x 25mm)	Load Over (300mm x 300mm)	Uniform Distributed Load	Panel Thickness (Nominal Ex Carpet)	System Weight (Typical)
BGM600C	Medium	3.0 kN	4.5 kN	8.0 kN/m ²	31mm	33kg/m ²


Certification

The panel is fully tested by an independent UKAS accredited laboratory to the PSA MOB PF2 PS/SPU March 1992 Medium Grade specification and is certified as being fully compliant. All of the Permaflor PSA panels have a 3 times working load safety factor, Class "O" spread of flame resistance and a 25 year warranty.



Wrap Around Tray Forming Encapsulation

Galvanised Steel Top and Bottom Sheet with Bonded Carpet

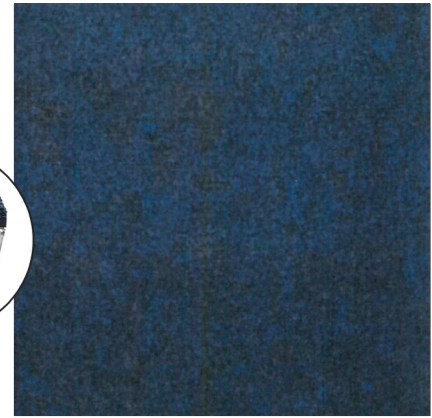

Finish

All of the Permaflor Steel Encapsulated panels are designed to be overlaid with finishes such as loose laid carpet tiles, however this panel has factory bonded needle punch carpet pre-bonded. Whatever your requirements, Permaflor will have the flooring solution to suit you.

Manufacture

All panels are manufactured in our flexible manufacturing facility in the UK, which allows us to offer total flexibility whilst maintaining the highest possible quality standard and ensures fast reaction and a reliable service. Materials used are sourced from high quality suppliers and use renewable, sustainable sources and suppliers wherever possible. We can also offer a bespoke service and specialise in replicating and reproducing existing raised floors.



Permaflor
access flooring solutions

The first choice for access flooring systems

For more information call
01432 347 722
sales@permaflor.co.uk