

BEM750 Medium Grade Edge Banded Panel



The panel consists of a high grade FSC® certified 30mm high density particle board core with full FSC accreditation in a sandwich construction with steel top and bottom sheet. This then has a full depth ABS edge band applied creating a fully encapsulated 750mm² panel to be laid with complete electrical continuity and has a high resistance to damage.

Product	Panel Grade	Classification	Safety Factor	Ultimate Load	Panel Thickness (Nominal)	System Weight (Typical)
BEM750	Medium	5/A/3/2	3x	> 10.0kN	33mm	35kg/m ²

Certification

The panel is fully tested to the BSEN12825:2001 5/A/3/2 specification and is fully compliant. The Permaflor BEM750 panels have a 3 times working load safety factor, Class "O" spread of flame resistance and a 1 year warranty.

Full FSC accreditation No FSC-ACC-008 TT-COC-003493.

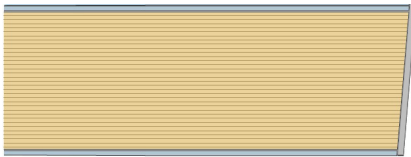

Full Depth ABS Edging

Galvanised steel top and bottom sheet



Finish

All of the Permaflor edge banded panels can have a wide range of factory bonded finishes that include wood, ceramic tile, carpet, high pressure laminate and vinyl. All of the edge banded factory bonded panels can be perforated for air flow. Whatever your requirement, Permaflor will have the flooring solution to suit you.

Manufacture

All panels are manufactured in our facility in the UK, which allows us to offer total flexibility whilst maintaining the highest possible quality standard and ensures fast reaction and a reliable service. Materials used are sourced from high quality suppliers and use renewable, sustainable sources and suppliers wherever possible. We can also offer a bespoke service and specialise in replicating and reproducing existing raised floors.



Permaflor
access flooring solutions

The first choice for access flooring systems

For more information call
01432 347 722
sales@permaflor.co.uk