


Support Pedestals H Range

PSA MOB PF2 PS/SPU Medium/Heavy Grade

Manufactured within the UK, allowing us to offer total flexibility whilst maintaining the highest possible quality standard and ensures fast reaction and a reliable service. Fully Compliant and tested with the Permaflor Panel to PSA MOB PF2 PS/SPU Medium/Heavy Grade

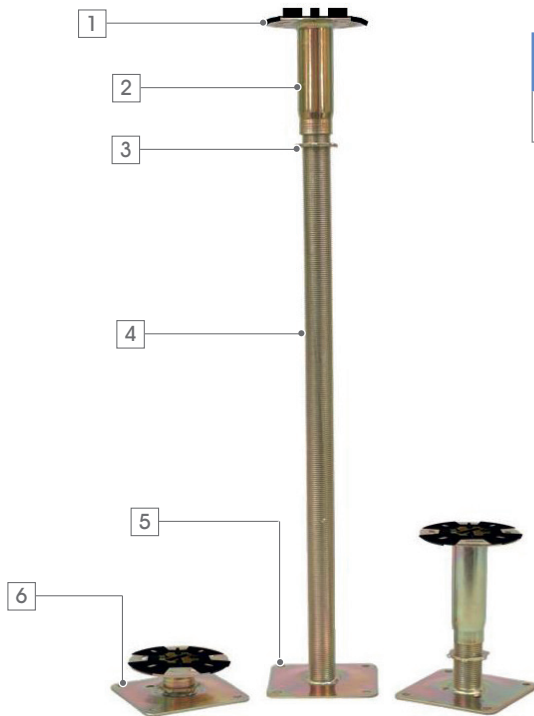

Pedestal Grade	Tube	Base Size	Void Range
Medium/Heavy	26mm	100mm x 100mm	26 - 675mm

1. Anti-vibration cap
2. Steel head
3. Locking nut
4. Threaded hollow steel tube
5. Steel square base
6. Pre-formed holes for optional mechanical fixing to slab

Head

The head is a 3mm thick x 90mm diameter disc made from a steel construction welded to an extended 32mm domed socket. An antivibration cap can be supplied suitable for use with or without stringers that has four integral up stands to ensure that panels are aligned and retained in position whilst being instantly removable with the correct lifting device. The head is threaded to 26mm BSP and fitted onto the up stand with a total vertical adjustment of 75mm in order to accommodate sub-floor tolerances.

Threaded Column

The 26mm threaded hollow tube is electro plated and assembled with a lightweight nut to offer the locking facility.

Base

This is a steel formed 100mm square with the up stand welded to it. Pre-formed holes are incorporated to facilitate mechanical fixings if required.



Permaflor
access flooring solutions

The first choice for access flooring systems

For more information call:
01432 347 722
sales@permaflor.co.uk