

BEM600VBT Medium Grade Vinyl Panel


TO PSA MOB PF2 PS/SPU Medium Grade

This replica BT panel consists of a high grade, FSC® certified, 30mm high density particle board core in a sandwich construction with steel top sheet and bottom tray. It is then covered with our standard static dissipative Gerflor Mipolam EL7 Robust Vinyl or other customer approved. This then has a half depth 2mm ABS edge band applied creating a fully encapsulated 600mm² panel to be laid with complete electrical continuity and has a high resistance to damage.

Product	Panel Grade	Point Load (25mm x 25mm)	Load Over (300mm x 300mm)	Uniform Distributed Load	Panel Thickness (Nominal)	System Weight (Typical)
BEM600VBT	Medium	3.0 kN	4.5 kN	8.0 kN/m ²	33mm	35kg/m ²


Certification

The panel is fully tested by an independent UKAS accredited laboratory to the PSA MOB PF2 PS/SPU March 1992 Medium Grade specification and is certified as being fully compliant. All of the Permaflor PSA panels have a 3 times working load safety factor, Class "O" spread of flame resistance and a 25 year warranty.

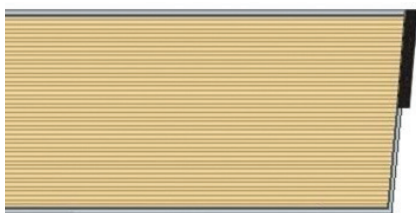

1/2 Depth 2mm
ABS Edging

Galvanised Steel Top
sheet and Bottom Tray

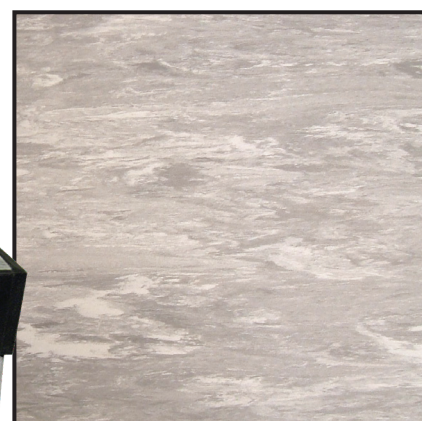

Finish

All of the Permaflor edge banded panels can have a wide range of factory bonded finishes that include wood, ceramic tile, carpet, high pressure laminate and vinyl. All of the edge banded factory bonded panels can be perforated for air flow. Whatever your requirement, Permaflor will have the flooring solution to suit you.

Manufacture

All panels are manufactured in our facility in the UK, which allows us to offer total flexibility whilst maintaining the highest possible quality standard and ensures fast reaction and a reliable service. Materials used are sourced from high quality suppliers and use renewable, sustainable sources and suppliers wherever possible. We can also offer a bespoke service and specialise in replicating and reproducing existing raised floors.



Permaflor
access flooring solutions

The first choice for access flooring systems

For more information call
01432 347 722
sales@permaflor.co.uk